

**NAU Maxi
1 Door Digital Refrigerator,
670lt (-2/+10) R290**

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

**110941 (ZRX71FRH)**1-door refrigerator
670lt, -2+10°C, digital, AISI
304, R290**Short Form Specification****Item No.**

Full door refrigerator entirely constructed in 304 AISI stainless steel with bottom panel in anti-corrosive material. Large digital display featuring temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads). HACCP-compliant control with alarms and history. Automatic defrost activates only when required with automatic evaporation of defrost water. Three probes to constantly monitor the working conditions of the appliance. Optimized back to front forced air flow and removable air conveyors provide even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Remote refrigeration unit; ventilated operation. Operating temperature: -2/+10 °C. CFC and HCFC free. R290a gas in refrigeration circuit. Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Main Features

- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Automatic defrost.
- Easy serviceability thanks to the intuitive control panel with access via app.
- Large digital white-digit display with cabinet temperature display and setting, activation of turbo frost cycle (to rapidly cool warm loads) and possibility to activate manually the defrost cycle.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Right hinged full door.
- Tropicalized unit.

Construction

- Easy access to the main components for maintenance.
- Constructed from the highest quality AISI 304 Stainless steel.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Doors are self-closing and can be fully opened up to 180°.
- Lockable door.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.
- Mounted on adjustable Stainless steel feet, with castors as an option.

Sustainability

- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- CFC and HCFC free, highly ecological refrigerant type:

APPROVAL:

Part of

Electrolux
Professional
Group**Zanussi Professional**
www.zanussiprofessional.com

R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.



NAU Maxi
1 Door Digital Refrigerator, 670lt (-2/+10) R290

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2025.09.28

Included Accessories


- 3 of 2/1GN grey rilsan grid with 2 runners PNC 881020

Optional Accessories


• 2 stainless steel runners for refrigerated cabinets (Marine)	PNC 880242	<input type="checkbox"/>
• Spacer for 670 lt and 1430 lt refrigerated cabinets	PNC 880248	<input type="checkbox"/>
• Pedal opening for cabinets	PNC 880324	<input type="checkbox"/>
• Kit remote alarm	PNC 880570	<input type="checkbox"/>
• Ethernet connectivity kit IJF for Refrigeration	PNC 880685	<input type="checkbox"/>
• 1/1GN plastic container with false bottom	PNC 880705	<input type="checkbox"/>
• 4 swivelling wheels (2 with brake), diam 125 mm, for refrigerators, NOT for remote models	PNC 881002	<input type="checkbox"/>
• Kit to fit 10 pastry trays (400x600mm)	PNC 881003	<input type="checkbox"/>
• 2/1GN grey rilsan grid	PNC 881004	<input type="checkbox"/>
• 2/1GN aisi 304 stainless steel grid	PNC 881016	<input type="checkbox"/>
• 2/1GN 304 AISI stainless steel grid with 2 runners	PNC 881018	<input type="checkbox"/>
• Meat rail for 670/1430lt refrigerators with 4 hooks	PNC 881019	<input type="checkbox"/>
• 2/1GN grey rilsan grid with 2 runners	PNC 881020	<input type="checkbox"/>
• Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers	PNC 881021	<input type="checkbox"/>
• 2/1GN perforated shelf	PNC 881042	<input type="checkbox"/>
• 1/1GN rilsan steel wire basket h=150mm	PNC 881043	<input type="checkbox"/>
• IoT module for refrigerated cabinets and counters	PNC 881298	<input type="checkbox"/>
• POE switch	PNC 922432	<input type="checkbox"/>

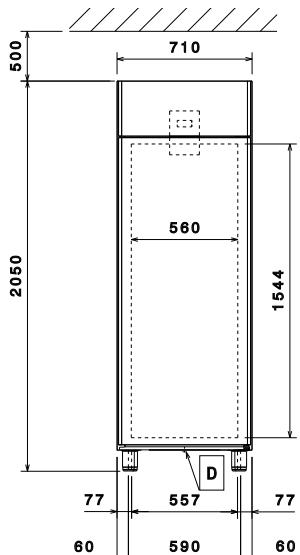

Front

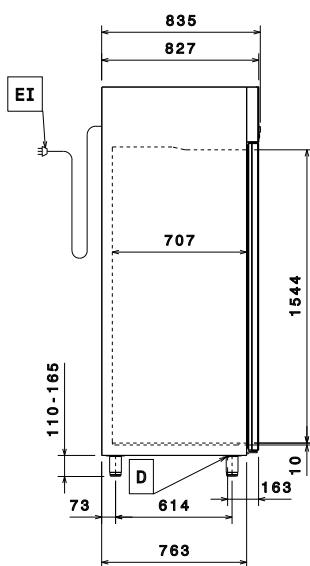

Side

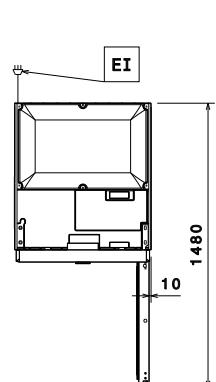

Top

Electric

Supply voltage: 220-240 V/1 ph/50 Hz
Electrical power, max: 0.2 kW

Capacity:

Number and type of grids (included): 3 - GN 2/1

Key Information:

Net Volume:	503 lt
Door hinges:	710 mm
External dimensions, Width:	835 mm
External dimensions, Depth:	1480 mm
External dimensions, Depth with Doors Open:	2050 mm
External dimensions, Height:	1 Full
Number and type of doors:	304 AISI
Type of external material:	304 AISI
Type of internal material:	304 AISI
Internal panels material:	44; 30 mm
Number of positions & pitch:	670 lt
Gross capacity:	vertical chilled
Type of model (EU Regulation. 2015/1094):	

Refrigeration Data



Control type:	Digital
Refrigeration power at evaporation temperature:	-10 °C
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigeration power:	278 W
Energy Class (EU Reg. 2015/1094):	C
Yearly and daily energy consumption (EU Reg. 2015/1094):	713kWh/year - 2kWh/24h
Climate class (EU Reg. 2015/1094):	Heavy Duty (5)
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	49,67

EI = Electrical inlet (power)



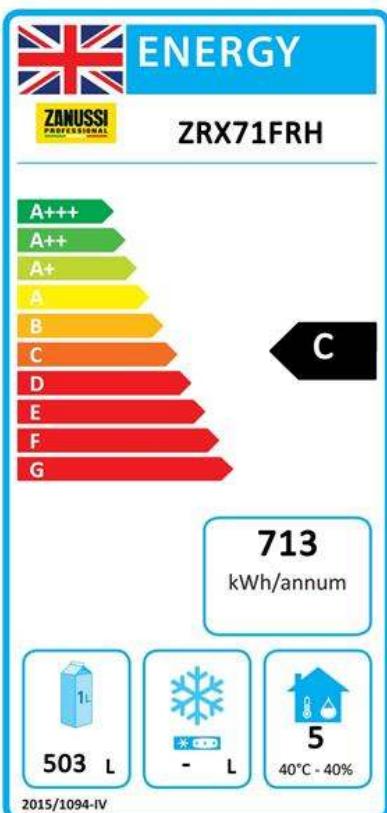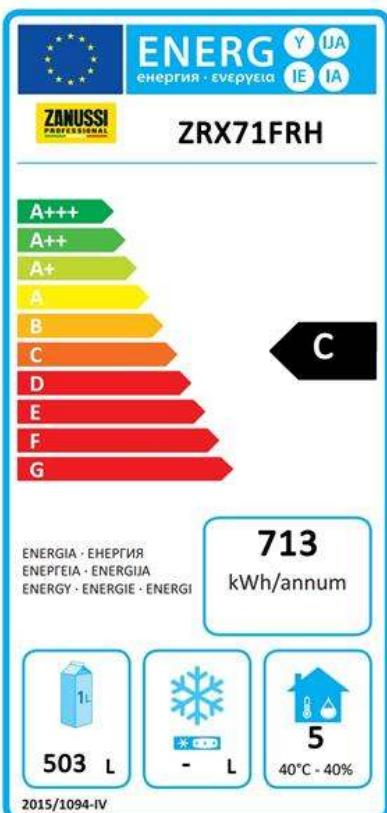

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.