

**Modular Cooking Range Line
EVO700 One Well Freestanding
Electric Fryer 15 liter****372081 (Z7FRED1GF0)**

15-lt electric fryer with 1 "V" shape well (external heating elements), 1 basket and lid included - free standing

Short Form Specification**Item No.**

To be installed on height adjustable feet in stainless steel. High efficiency infrared heating elements (10kW) attached to the outside of the well. Deep drawn V-shaped well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Unit to be mounted on height adjustable feet in stainless steel.
- Deep drawn V-Shaped well.
- High efficiency infrared heating elements are attached to the outside of the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- IPx4 water protection.
- Optional portable oil quality monitoring tool (code 9B8081) for efficient oil management.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).

APPROVAL: _____

Part of

Electrolux
Professional
Group**Zanussi Professional**
www.zanussiprofessional.com

Included Accessories

- 1 of Door for open base cupboard
- 1 of Basket for 14 and 15lt fryers

PNC 206342
PNC 921691

Optional Accessories


- Junction sealing kit
- Flanged feet kit
- Frontal kicking strip for concrete installation, 400 mm
- Frontal kicking strip for concrete installation, 800 mm
- Frontal kicking strip for concrete installation, 1000 mm
- Frontal kicking strip for concrete installation, 1200 mm
- Frontal kicking strip for concrete installation, 1600 mm
- Frontal handrail 400 mm
- Frontal handrail 800 mm
- Frontal kicking strip, 400 mm
- Frontal kicking strip, 800 mm
- Frontal kicking strip, 1000 mm
- Frontal kicking strip, 1200 mm
- Frontal kicking strip, 1600 mm
- Large handrail (portioning shelf) 400 mm
- Large handrail (portioning shelf) 800 mm
- Frontal handrail 1200 mm
- Frontal handrail 1600 mm
- 4 feet for concrete installation (not for 900 line freestanding grill)
- Sediment tray for 15lt fryers
- Right and left side handrails
- Pair of side kicking strips
- Pair of side kicking strips (concrete installation)
- Oil drain pipe for 15lt free standing fryer
- Chimney upstand, 400 mm
- 2 side covering panels, height 700 mm, depth 700 mm
- Door for open base cupboard
- Base support for feet or wheels - 400mm (EVO700/900)
- Base support for feet or wheels - 800mm (EVO700/900)
- Base support for feet or wheels - 1200mm (EVO700/EVO900)
- Base support for feet or wheels - 1600mm (EVO700/900)
- Rear paneling - 600mm (EVO700/900)
- Rear paneling - 800mm (EVO700/900)

PNC 206086
PNC 206136
PNC 206147
PNC 206148
PNC 206150
PNC 206151
PNC 206152
PNC 206166
PNC 206167
PNC 206175
PNC 206176
PNC 206177
PNC 206178
PNC 206179
PNC 206185
PNC 206186
PNC 206191
PNC 206192
PNC 206210
PNC 206235
PNC 206240
PNC 206249
PNC 206265
PNC 206301
PNC 206303
PNC 206319
PNC 206342
PNC 206366
PNC 206367
PNC 206368
PNC 206369
PNC 206373
PNC 206374


- Rear paneling - 1000mm (EVO700/900)
- Rear paneling - 1200mm (EVO700/900)
- Chimney grid net, 400mm
- Base support for feet/wheels (600mm)
- Basket for 14 and 15lt fryers
- 2 half size baskets for 14 and 15lt fryers
- Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers
- Unclogging rod for 15lt fryers drainage pipe
- Deflector for floured products for the 15lt fryer

PNC 206375
PNC 206376
PNC 206400
PNC 206431
PNC 921691
PNC 921692
PNC 921693
PNC 921695
PNC 921696

Front

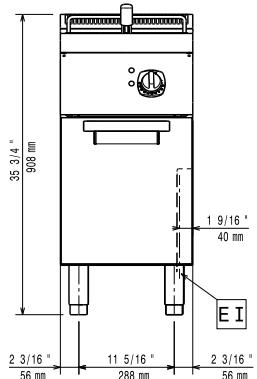


Side

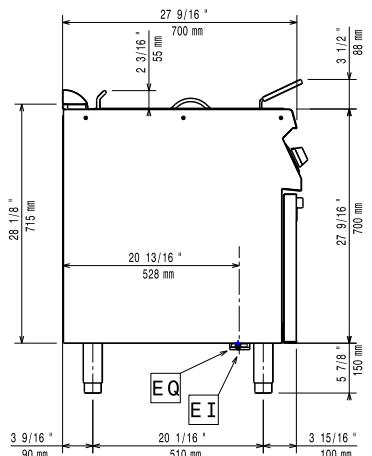

EI = Electrical inlet (power)

EQ = Equipotential screw

Top

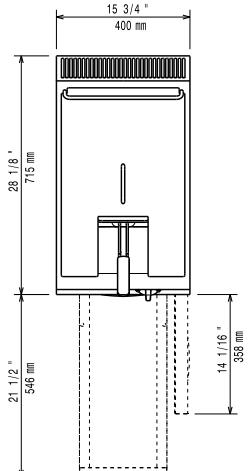

Electric

Supply voltage: 380-400 V/3N ph/50-60 Hz

Predisposed for:

Total Watts:

10 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Usable well dimensions (width): 240 mm

Usable well dimensions (height): 505 mm

Usable well dimensions (depth): 380 mm

Well capacity:

13 lt MIN; 15 lt MAX

Thermostat Range: 105 °C MIN; 185 °C MAX

Net weight: 59 kg

Shipping weight: 52 kg

Shipping height: 1130 mm

Shipping width: 460 mm

Shipping depth: 820 mm

Shipping volume: 0.43 m³

Certification group: EFE71M15



**Modular Cooking Range Line
EVO700 One Well Freestanding Electric Fryer 15 liter**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.09.26