

**Modular Cooking Range Line
EVO700 4 Hot Plate Electric
Induction Cooking Top Range**

372021 (Z7INEH4000)

4-zone (3,5 kW each) electric
induction cooking top**Short Form Specification****Item No.**

6 mm thick glass ceramic cooking surface with 4 independently controlled 3.5 kW induction zones. Induction top surface with seamless transition between individual heating zones. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- 6mm glass ceramic cooking surface with 4 independently controlled induction zones with a power of 3.5 kW per zone.
- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Indicating lamp for each zone located on control console.
- Induction plates endowed with overheating safety device.
- Power to the individual zones can be set with progressive output i.e. fine regulation at the lower and larger progress at the upper levels.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- IPx4 water protection.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability

- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).


Optional Accessories

• Support for bridge type installation, 800 mm	PNC 206137	<input type="checkbox"/>
• Support for bridge type installation, 1000 mm	PNC 206138	<input type="checkbox"/>
• Support for bridge type installation, 1200 mm	PNC 206139	<input type="checkbox"/>
• Support for bridge type installation, 1400 mm	PNC 206140	<input type="checkbox"/>
• Support for bridge type installation, 1600 mm	PNC 206141	<input type="checkbox"/>
• Water column extension	PNC 206291	<input type="checkbox"/>
• Chimney upstand, 800 mm	PNC 206304	<input type="checkbox"/>
• 2 side covering panels, height 250 mm, depth 700 mm	PNC 206320	<input type="checkbox"/>
• Chimney grid net, 400mm	PNC 206400	<input type="checkbox"/>
• Stainless steel universal frying pan with stainless steel handle (diam. 200 mm) suitable for induction and all other heating sources	PNC 653596	<input type="checkbox"/>
• Universal frying pan with stainless steel handle (diam. 240 mm) suitable for induction and all other heating sources	PNC 653597	<input type="checkbox"/>
• Universal frying pan with stainless steel handle (diam. 280 mm) suitable for induction and all other heating sources	PNC 653598	<input type="checkbox"/>


APPROVAL: _____

Part of

Electrolux
Professional
Group**Zanussi Professional**
www.zanussiprofessional.com

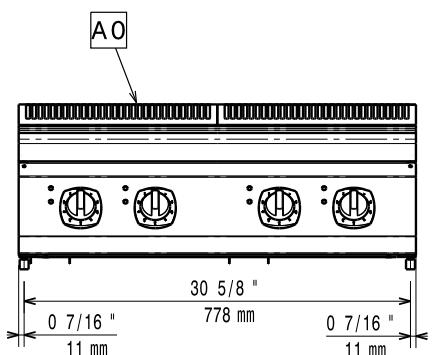


Front

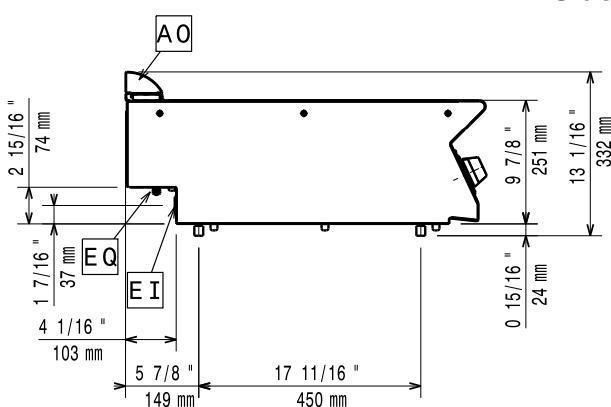

EI = Electrical inlet (power)

EQ = Equipotential screw

Side

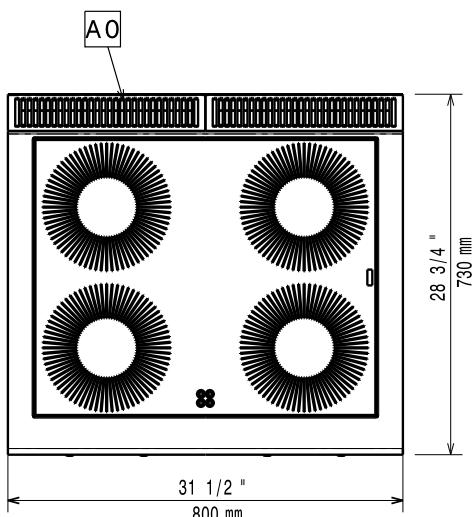

Top

Electric

Supply voltage: 380/415 V/3 ph/50/60 Hz

Predisposed for: 380-415V 3~ 50/60Hz 14kW

Total Watts: 14 kW

Key Information:

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Induction compatible pots & pans must be used.

Net weight: 57 kg

Shipping weight: 66 kg

Shipping height: 530 mm

Shipping width: 820 mm

Shipping depth: 860 mm

Shipping volume: 0.37 m³

Certification group: IH740

Induction Top Dimensions (width): 800 mm

Induction Top Dimensions (depth): 700 mm

